


Tech specs

 BASELINE

MotionProtect Jeweller

Wireless IR motion detector

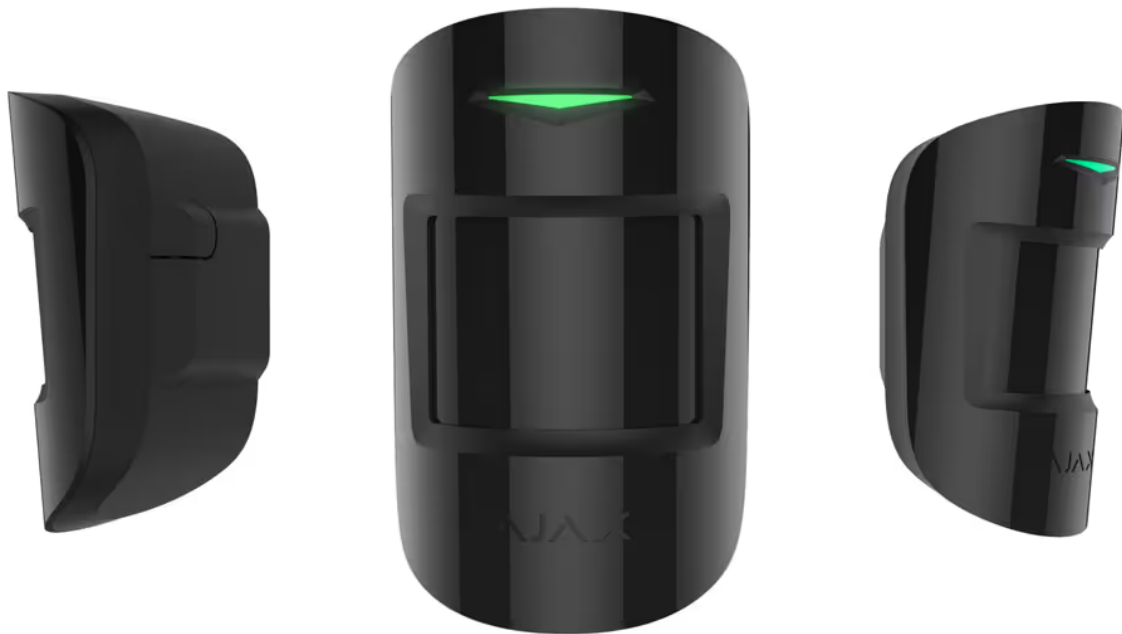

Devices compatibility

Check

Communication

Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced sabotage protection.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

Learn more >

Frequency bands

866.0–866.5 MHz

868.0–868.6 MHz

868.7–869.2 MHz

905.0–926.5 MHz

915.85–926.5 MHz

921.0–922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

Radio signal modulation

GFSK

Radio communication range

up to 1,700 m

Between the device and a hub (or a range extender) in an open space.

Calculate radio communication range at the facility >

Encrypted communication

All stored and transmitted data are protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

Learn more >

Detection

Sensitive element

PIR sensor

Motion detection distance

up to 12 m

When installed at the height of 2.4 m.

Motion detection angle

horizontal: 88.5°


Motion detection speed

from 0.3 to 2 m/s

The direction of the detector lens should be perpendicular to an alleged intrusion path into the facility.

Sensitivity

3 levels

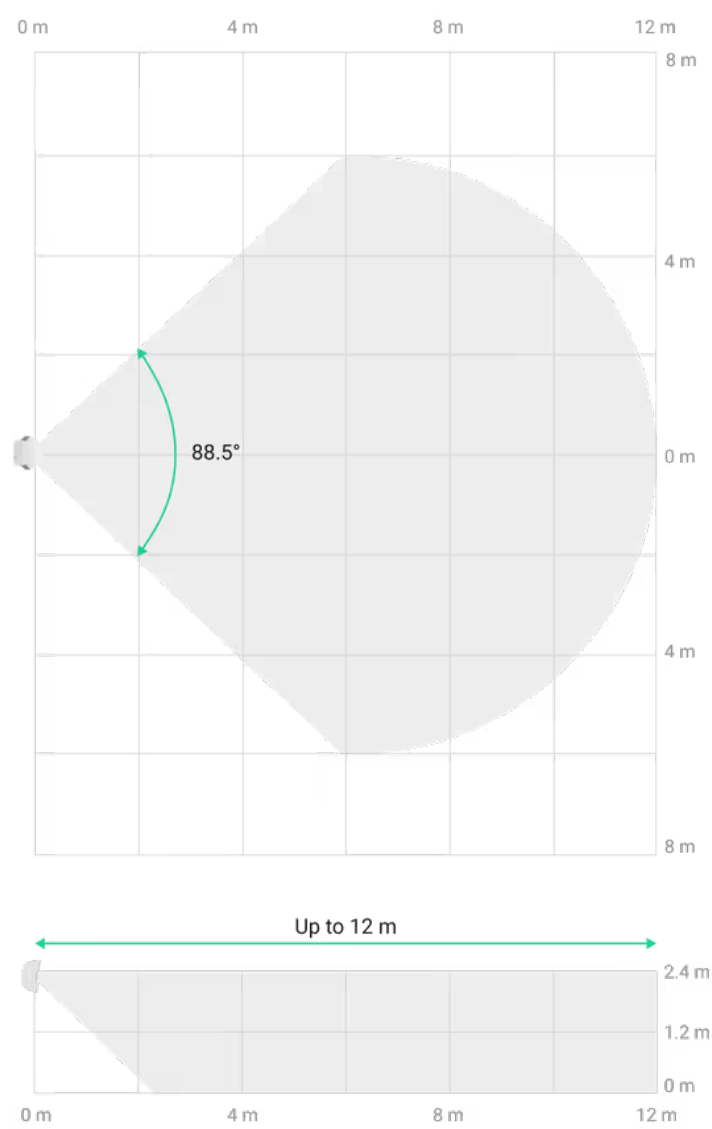

Adjusted by a PRO or a user with admin rights in the Ajax app.

Pet immunity

weight:up to 20 kg

height:up to 50 cm

Learn more >

False alarm prevention

SmartDetect

Software algorithm.

Learn more >

Temperature compensation

Effective motion detection at temperatures from -10°C to $+40^{\circ}\text{C}$.

Learn more >

Recommendations

It is recommended to install the detector at a height of 2.4 m.

The device is designed for indoor use only.

Sabotage protection

Tamper alarm

Notifications on attempts to detach the detector from the surface or remove it from the mounting panel.

[Learn more](#) >

Protection against spoofing

device authentication

Communication loss detection

after 36 s

Detection time depends on the Jeweller or Jeweller/Fibra settings.

[Learn more](#) >

Power supply

Battery

1 × CR123A

Pre-installed.

Type

Type C.

Detector’s operating voltage range

2.1–3.3 V_{DC}

Detector’s nominal operating voltage

3 V_{DC}

Quiescent detector’s current consumption at nominal voltage

34.5 µA

Maximum detector's current consumption at nominal voltage

61 mA

Full battery capacity

1,600 mAh

Low battery voltage

2.5 V_{min}

Low battery recovery voltage

2.7 V_{min}

End-of-life battery voltage

2.1 V_{min}

The device is switched off.

End-of-life battery capacity

300 mAh

Calculated battery life

up to 5 years

Learn more >

Manufacturer

Huiderui

Enclosure

Dimensions

110 × 65 × 50 mm

Weight

86 g

Operating temperature range

from -10 °C to +40 °C

Operating humidity

up to 75%

Protection class

IP50



Colors

Black



White



Complete set

MotionProtect Jeweller

SmartBracket mounting panel

CR123A battery (pre-installed)

Installation kit

Quick start guide

Certification and compliance with standards



MotionProtect Jeweller



Additional information

Compliance with standards

Learn more >

User manual

Learn more >

Warranty

24 months

Learn more >

Products

Superior

Software

For users

Subscribe

Subscribe to our emails about secure life. No spam.

Fibra

Intrusion protection

Video surveillance

Fire detection

Water leak prevention

Comfort & Productivity

All products

Ajax ecosystem integrations

Ajax Ready products

Solutions

Customer stories

Solutions by facility type

Upgrades and retrofits

Why Ajax

How it works

Company

Blog

About us



Press page

Events

PRO Desktop

Ajax Translator

Scenarios



Support

Manuals and articles

Compliance with standards

Tools

Battery life calculator

Radio communication range calculator

Fibra power supply calculator

Case configurator

Switches and outlets configurator

Ajax devices compatibility

All web tools

For partners

For partners

Ajax Academy

Partner Portal

Subscribe

Request extra help

support@ajax.systems

@AjaxSystemsSupport_Bot



2,500,000

people worldwide under Ajax protection



Career

Reviews and feedback

 [Australia](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#)
[Cookie policy](#) [Anti-Spam Policy](#) [End user agreement](#) [Warranty](#)

© 2024 AJAX SYSTEMS CH. All rights reserved