


Tech specs

BASELINE

KeyPad TouchScreen Jeweller

Wireless keypad with a touch screen that supports authentication with smartphones, Pass, Tag, and codes

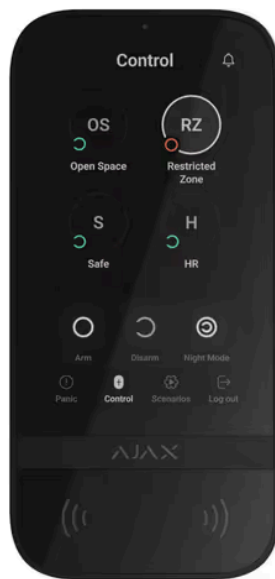

Devices compatibility



Communication

Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced sabotage protection.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote configuration in the Ajax apps.

[Learn more](#) >

Frequency bands

866.0 – 866.5 MHz

868.0 – 868.6 MHz

868.7 – 869.2 MHz

905.0 – 926.5 MHz

915.85 – 926.5 MHz

921.0 – 922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and noise interference.

Radio signal modulation

GFSK

Radio signal range

up to 1,700 m

Between keypad and hub (or range extender) in an open space.

Calculate the radio signal range at the facility >

Encrypted communication

All the data stored and transmitted are protected by block encryption with a dynamic key.

Frequency hopping

Radio communication uses frequency hopping to prevent interception and jamming.

Learn more >

Proprietary wireless communication technology for transmitting the list of the groups, rooms and detectors to form the list of malfunctions.

Key features:

- Two-way communication.
- Block encryption featuring a dynamic key.
- Advanced sabotage protection.
- Reloading the data packages in case of transmission errors.

Learn more >

Frequency bands

866.0 – 866.5 MHz

868.0 – 868.6 MHz

868.7 – 869.2 MHz

905.0 – 926.5 MHz

915.85 – 926.5 MHz

921.0 – 922.0 MHz

Depends on the sales region.

Radio signal range

up to 1,700 m

Between keypad and hub (or range extender) in an open space.

Calculate the radio signal range at the facility >

Encrypted communication

All stored and transmitted data are protected by block encryption with a dynamic key.

Frequency hopping

Radio communication uses frequency hopping to prevent interception and jamming.

[Learn more](#) >

Display

Diagonal

5"

Matrix type

IPS

Resolution

480 × 854 px

Sensor

capacitive

Brightness settings

- automatic
- manual

If **Auto Adjust** is enabled, the display brightness depends on the light conditions. This saves battery power.

Backlight lifetime

30,000 hours

Guaranteed backlight lifetime when the **Always Active Display** toggle is enabled. It can be adjusted in Ajax apps and activates only when external power is connected.

User interface

Dark



Light



Key features

Panic buttons

- panic
- fire
- auxiliary help

Sending an alarm or calling for help from the separate keypad tab.

Control

- codes
- Tag key fobs
- Pass cards
- smartphone (Bluetooth)

Contactless access

DESFire® EV1, EV2

ISO14443-A (13.56 MHz)

Access codes

up to 200 personal codes

One code per each user. The number of personal access codes depends on the hub model.

1 keypad code

Per each KeyPad TouchScreen.

Duress codes

up to 200 personal codes

One code per each user. The number of personal duress codes depends on the hub model.

1 keypad code

Per each KeyPad TouchScreen.

Codes for unregistered people

up to 99 personal codes

For people who are not registered in the Ajax system. The number of such codes depends on the hub model.

Arming without entering a code

The enabled feature allows the user to arm the system without entering a code or presenting the access device.

Group management

Changing the security mode of the groups to which the user has access from the keypad's display.

Learn more >

Scenarios management

A separate keypad tab contains up to 6 buttons, and each one can control one automation device or a group of devices.

[Learn more](#) >

Indication of malfunctions and security mode

- display
- logo
- sound indication

If enabled, the logo lights up red continuously or when the system or group is armed. KeyPad TouchScreen indication is shown on the display only when it is active. Built-in buzzer notifies about alarms, door openings and entry/exit delays.

Fire alarm muting

Turns off the fire detectors alarm, including the interconnected alarm.

[Learn more](#) >

User pre-authorization

When the feature is enabled, viewing the current system status and control screen is unavailable. For access, the user must pre-authorize: enter a code or present a personal access device to the keypad.

Contactless authorization with a smartphone

A smartphone with the installed Ajax app and Bluetooth Low Energy (BLE) support can be used instead of Tag or Pass to authorize a user. BLE is a radio protocol with low power consumption. The keypad supports Android and iOS smartphones with BLE 4.2 and higher.

Auto screen wakeup

The keypad wakes up automatically when approaching it. The approaching distance can be adjusted in the app.

Remote firmware update

When a new firmware is available, an admin or PRO with the rights to configure the system can run the update in Ajax apps.

The keypad must be connected to an external power supply to update the firmware.

Learn more >

ACE Type

type B

Recommendations

The device is designed for indoor use only.

Please note that the keypad must be connected to an external power supply to update the firmware and keep the screen always active.

Sabotage protection

Unauthorized access auto-lock

The keypad locks if an incorrect code is entered or unverified access devices are used more than 3 times in a row within 1 minute. The lock time is adjusted by PRO or user with admin rights in the Ajax app.

Tamper alarm

Notifications on attempts to detach the keypad from the surface or remove it from the mounting panel.

Learn more >

Holding screw

To secure the keypad on SmartBracket.

Protection against spoofing

device authentication

Communication loss detection

after 36 s

Detection time depends on the Jeweller or Jeweller/Fibra settings.

[Learn more](#) >

Power supply

Battery

6 × AA

Pre-installed.

Type

type C

Calculated battery life

up to 1.5 years

With default settings and up to 4 interactions with a keypad per day.

Keypad's operating voltage range

10.5–14 V_{DC}, up to 0.4 A

The batteries serve as a backup when the external power supply is connected.

Keypad's nominal operating voltage

12 V_{DC}

Quiescent keypad's current consumption at nominal voltage

46 μ A

Maximum keypad's current consumption at nominal voltage

1.5 mA

Full battery capacity

2,650 mAh

Low battery voltage

6.6 V_{DC}

Low battery recovery voltage

8.1 V_{DC}

End-of-life battery voltage

4.92 V_{DC}

Device is switched off.

End-of-life battery capacity

350 mAh

Enclosure

Dimensions

172 × 82 × 26 mm

Weight

327 g

Operating temperature range

from -10°C to +40°C

Operating humidity

up to 75%



Colours

Black



White



Complete set

KeyPad TouchScreen Jeweller

SmartBracket mounting panel

6 AA batteries (pre-installed)

Installation kit

Quick start guide

Certification and compliance with standards



Keypad TouchScreen Jeweller



Additional information

Compliance with standards

[Learn more >](#)

User manual

[Learn more >](#)

Warranty

24 months

[Learn more >](#)

Products

Superior

Fibra

Intrusion protection

Software

For users

PRO Desktop

Ajax Translator


Subscribe


Subscribe to our emails about secure life. No spam.

[Subscribe](#)



- Video surveillance
- Fire detection
- Water leak prevention
- Comfort & Productivity
- All products
- Ajax ecosystem integrations
- Ajax Ready products

Scenarios

 Available on
App Store

 Available on
Google Play

Request extra help

-  support@ajax.systems
-  [@AjaxSystemsSupport_Bot](https://twitter.com/AjaxSystemsSupport_Bot)

 **Trustpilot**


Rating 4.6

2,500,000

people worldwide under Ajax protection

Solutions

- Customer stories
- Solutions by facility type
- Upgrades and retrofits
- Why Ajax
- How it works

Support

- Manuals and articles
- Compliance with standards

Tools

- Battery life calculator
- Radio communication range calculator
- Fibra power supply calculator
- Case configurator
- Switches and outlets configurator
- Ajax devices compatibility
- All web tools

Company

- Blog
- About us
- Press page
- Events
- Career
- Reviews and feedback

For partners

- For partners
- Ajax Academy
- Partner Portal





[Australia](#)

[Privacy policy](#)

[Report a vulnerability](#)

[GDPR White Paper](#)

[NDAA Statement](#)

[Cookie policy](#)

[Anti-Spam Policy](#)

[End user agreement](#)

[Warranty](#)

© 2024 AJAX SYSTEMS CH. All rights reserved